

OUTDOORBEAMER.COM



# PROneo<sup>®</sup>compact



6000 - 20.000 Lumen





# PROneo<sup>®</sup> COMPACT

The most reliable projection system for outdoor use.  
Perfectly matched components ensure precise  
projections in any weather.

## Flexibility

This projection system impresses with its performance and image quality in the smallest of. Despite compact housing dimensions, light output up to 20,000 lumens are available. Depending on the ambient brightness, this corresponds to a projectable image area of up to 250 square meters.

## Operational reliability

Thanks to the modern, maintenance-free laser light source, projection times of up to 20,000 hours can be realized.

## Resolution

The high native WUXGA resolution delivers finest clear details. With the switchable 4K enhancement function external 4K content can be external 4K content quickly and easily.

## True RGB

True RGB with the 3 LCD technology, rich colors, high contrasts and a tuned wide color space provide finest color gradations. Clear picture details without rainbow effect and without annoying flickering.

## Optics

Up to 9 motorized interchangeable lenses are available for the Compact series. The additional motorized lens shift rounds off the high degree of flexibility. Set up - adjust - project!

## Connection

All electrical connections are designed as Neutrik Connector on the underside. Standardized connectors for power, network, HDMI and audio, ensure quick readiness for use.

## Installation

The 4-point truss connection on the underside ensures a secure hold. Due to the standardized mounting point, the projector can be quickly and reliably quickly and reliably.

## Control

The integrated PROmapr<sup>®</sup> Digital Signage Mapping Mediaplayer controls all projections and show sequences. Setup, programming and file upload can be via LAN, USB and WiFi.



PROneo <sup>®</sup> COMPACT 6	6000 Lumen	16:10 0.76" 65qm	550 Watt	75 kg
PROneo <sup>®</sup> COMPACT 7	7000 Lumen	16:10 0.76" 85qm	620 Watt	75 kg
PROneo <sup>®</sup> COMPACT 8	8500 Lumen	16:10 0.76" 100qm	690 Watt	75 kg
PROneo <sup>®</sup> COMPACT 10	10.000 Lumen	16:10 1.03" 125qm	835 Watt	82 kg
PROneo <sup>®</sup> COMPACT 13	13.000 Lumen	16:10 1.03" 160qm	990 Watt	85 kg
PROneo <sup>®</sup> COMPACT 16	16.000 Lumen	16:10 1.03" 200qm	1100 Watt	85 kg
PROneo <sup>®</sup> COMPACT 20	20.000 Lumen	16:10 1.03" 250qm	1300 Watt	85 kg

Projection system	3 LCD (EPSON)
Resolution	WUXGA, 1920 x 1200
4K	4K enhancement
Image format	16:10
Contrast	2.500.000 : 1 (Native 2000:1)
Light source	Laser (Lifecycle ~ 20.000h)
Brightness	6000 - 20.000 Lumen**
Optics	0,35 - 10,11 : 1
Interchangeable lenses	9 available
Standard lens	Included
Connections	Power In, Out, Switched, USB 2 x LAN, Audio, Remote, HDMI
Operating voltage	AC 100V - 240V
Power consumption	550W - 1300W**
Operating temperature range	-20°C - +40°C
Humidity	20% - 80%
Media server	PROmapr®
Software	PROmapr® OS
Media	JPG, PNG, GIF, MP4
Content Storage	32GB - 180GB**
Wireless	WiFi and HotSpot
Housing dimensions 6 - 10k	W 800mm, L 800mm, H 400mm
Outer dimensions 6 - 10k	W 800mm, L 960mm, H 455mm
Housing dimensions 13 - 20k	W 845mm, L 900mm, H 450mm
Outer dimensions 13 - 20k	W 845mm, L 1100mm, H 505mm
Housing color	similar to RAL 9010***
Color of attachments	similar to RAL 2004***
Operating angle	Hor. / Vert. max +30° / - 30°
Weight	75kg - 85kg**
Warranty	24 months
Availability	on request

\*\*Equipment dependent

\*\*\* Special paint finishes on request

## Available accessories



## Dimensions

Illustrated model


# PROneo<sup>®</sup> 20 COMPACT

20.000  
Lumen

16:10  
1,03"  
250qm

1300  
Watt


kg  
85

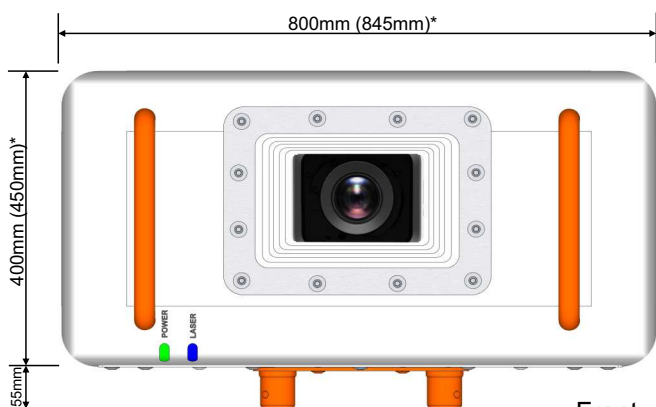

Front



Side

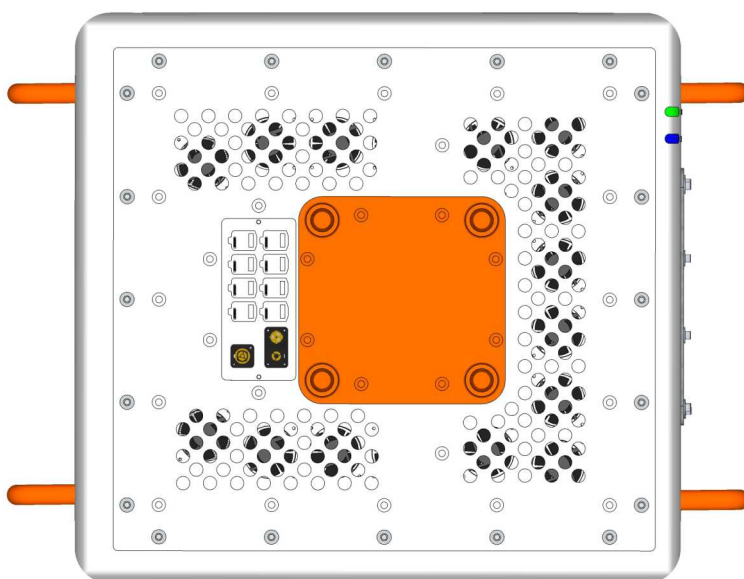

Bottom

\*The housing dimensions of the models 13, 16 and 20 differ from the models 6 - 10.

Changes and errors excepted. Illustrations similar.